


Type SMA / Dimensions (mm)

Type	A	B	C	CH	D	E	F	G	H	L	M	N	O	P	Q	Weight Kg
SMA210	210	195	20	19	25	50	25	10.5	33	70	43	50	26	98	3	2.6
SMA270	270	195	20	19	25	50	25	10.5	33	70	43	50	26	98	3	3.0
SMA307	307	213	20	19	25	50	25	10.5	33	70	65	50	24	108	3	3.2
SMA340	340	290	27	22	30	62	30	12.5	40	95	90	62	38	165	4	6.3
SMA380	380	240	27	19	25	43	30	12.0	33	95	96	43	29	160	3	4.5
SMA430	430	290	27	22	30	62	30	12.5	40	95	90	62	38	165	4	7.5
SMA450	450	350	40	22	30	55	30	15.0	40	125	174	55	33	225	4	9.7
SMA490	490	410	40	22	30	60	30	15.0	40	95	193	60	48.5	284	4	10.8

Material: Steel

Surface treatment: Zinc plated

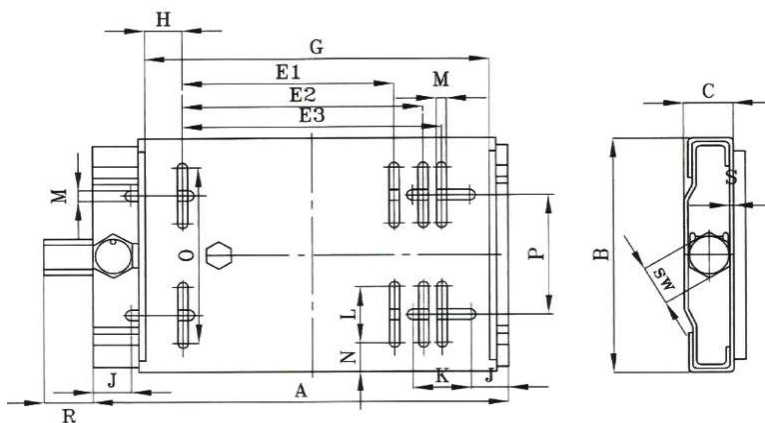

Type MP / Dimensions (mm)

Type	Motor Size	A	B	C	E1	E2	E3	G	H	J	K	L	M	O	P	R	Weight kg
63/90	63-71-80-90	270	195	33	100	125	140	190	25	25	50	50	10.5	132	98	25	3.1
90/112	90-100-112	307	213	33	140	160	190	255	32.5	25	50	50	10.5	162	108	25	4.1
100/132-2	100-112-132	340	290	40	160	190	216	286	35	30	62	48	12.5	215	165	30	7.9
100/132	100-112-132	430	290	40	160	190	216	286	35	30	62	48	12.5	215	165	30	8.9
160/180-2	160-180	430	370	40		254	279	379	50	30	62	62	12.5	287	248	30	12
160/180	160-180	490	370	40		254	279	379	50	30	62	62	12.5	287	248	30	12.7
180/200	180-200	490	410	40		279	318	420	50	30	60	52	17	329	285	30	14.6
200/225	200-225	585	450	50		318	356	468	56	30	60	52	17	352	300	30	23.7
250*	250	600	470	65			406	515	54.5	30	60	60	22	369	320	35	28.1
280*	280	735	570	65			457	585	64	30	70	70	22	460	420	35	38.2

Material: Steel

Surface treatment: Zinc plated